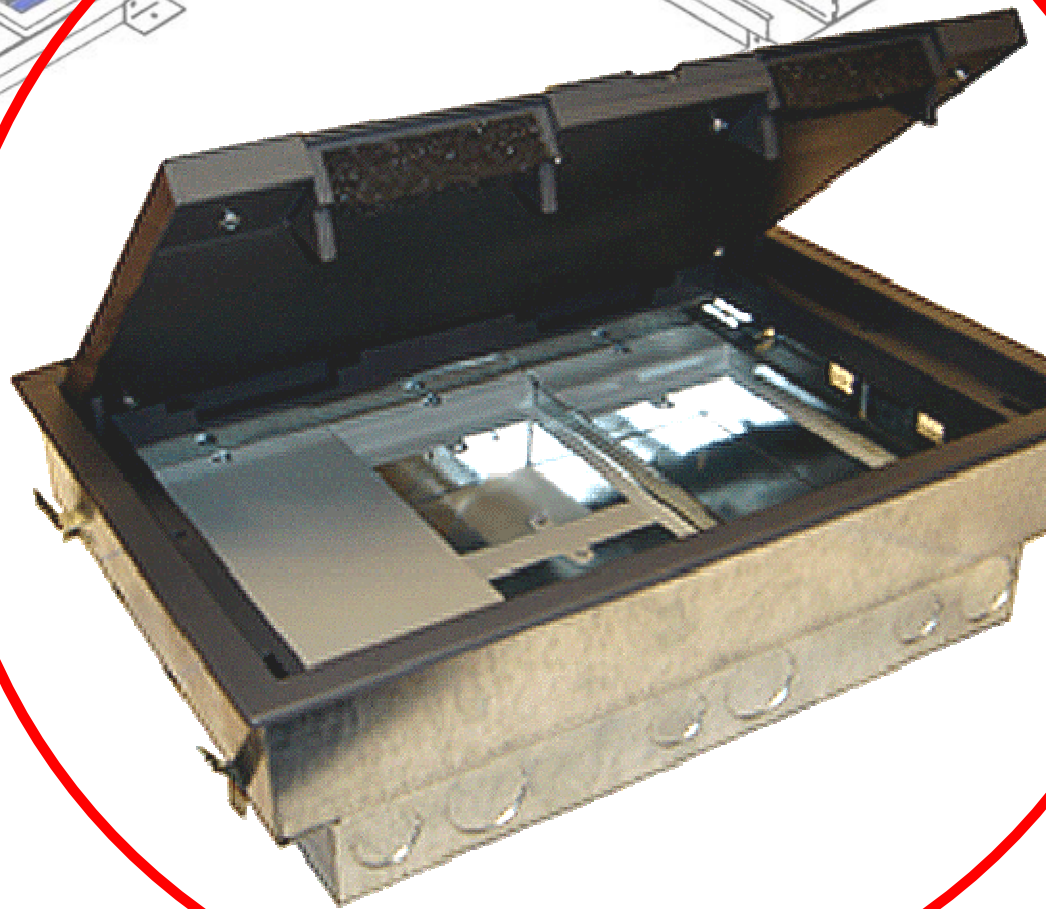
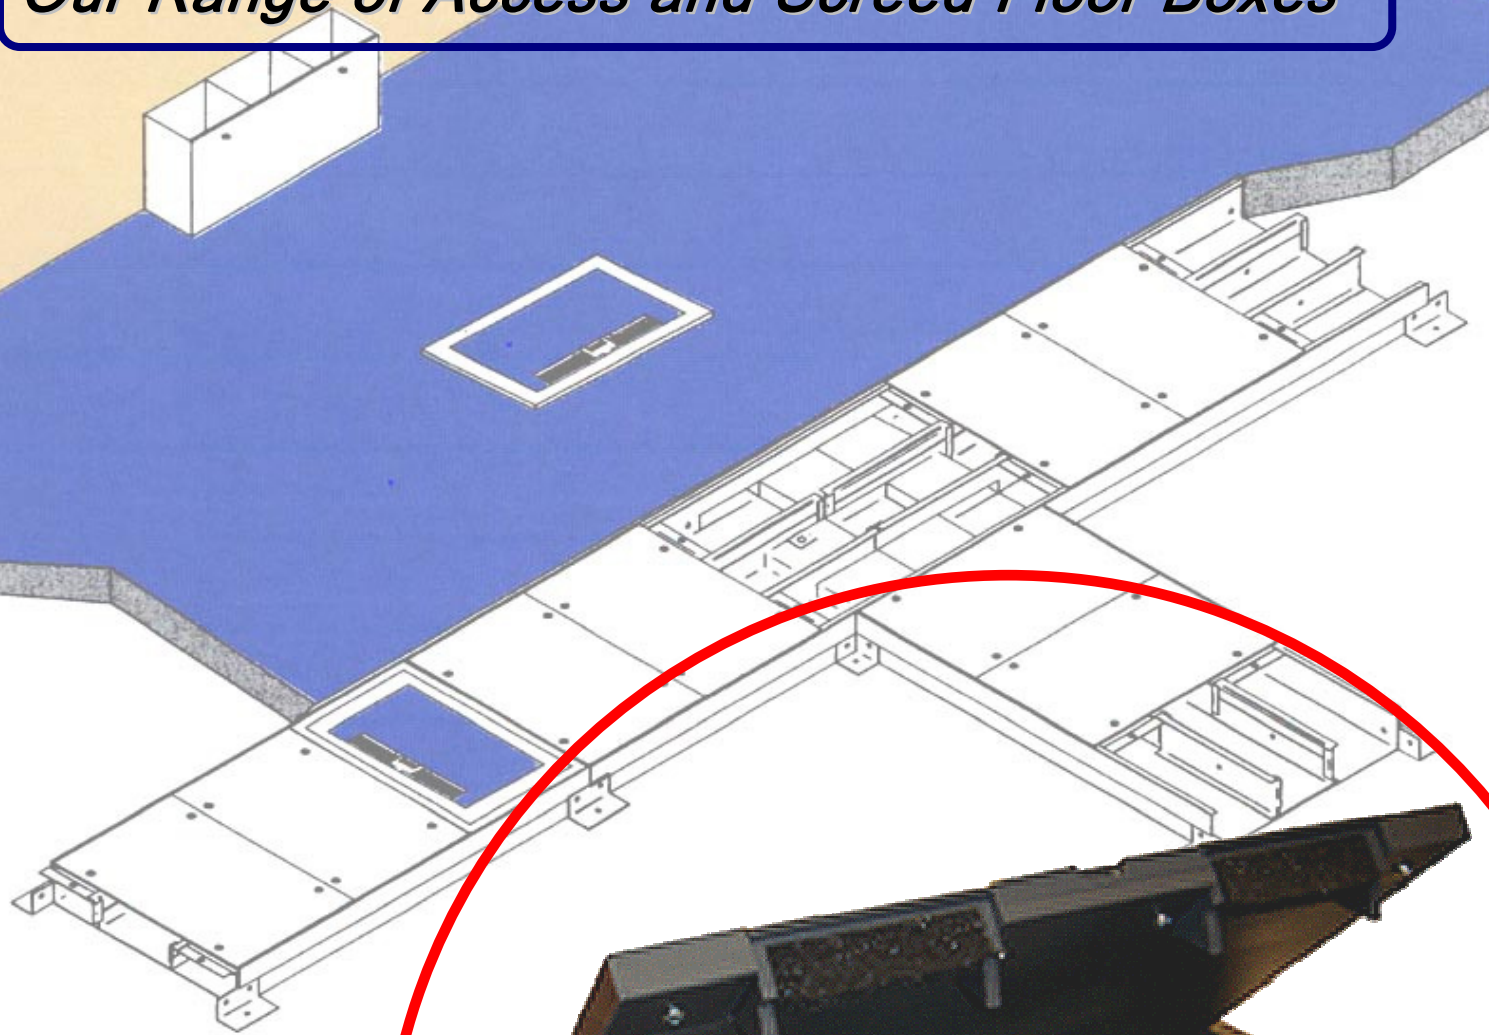


Our Range of Access and Screed Floor Boxes



€uroMy

LNE Network Systems (Asia) Sdn Bhd,

No. 9, Jalan Gangsa SD5/3E, Sri Damansara Industrial Park, 52200 Kuala Lumpur, Malaysia.

Tel: +60 (0) 3 6274 2400, Fax: +60 (0) 3 6274 1624

Single Compartment**Specifications**

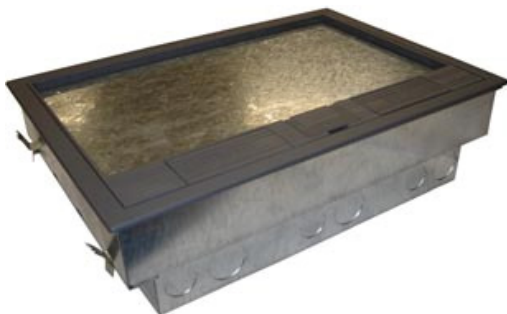
- Floor box manufactured from galvanised steel.
- 20mm knockouts punched to accept flexible conduit.
- Minimum plug space 28mm
- Lid/trim assembly manufactured from stainless steel
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle
- 4 spring fixing clips for quick fit

Overall Depth	Code
75	RFB 1075
85	RFB 1085

Three Compartment**Specifications**

- Floor box manufactured from galvanised steel.
- 20 & 25mm knockouts punched to accept flexible conduit.
- Panel cut out 300 x 200mm
- Minimum plug space 28mm
- Lid/trim assembly manufactured from flame retardant high impact ABS
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle
- 4 spring fixing clips for quick fit

Overall Depth	Code
55	RFB 3055
65	RFB 3065
75	RFB 3075
85	RFB 3085

Four Compartment**Specifications**

- Floor box manufactured from galvanised steel.
- 20 & 25mm knockouts punched to accept flexible conduit.
- Panel cut out 300 x 200mm
- Minimum plug space 28mm
- Lid/trim assembly manufactured from flame retardant high impact ABS
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle
- 4 spring fixing clips for quick fit

Overall Depth	Code
55	RFB 4055
65	RFB 4065
75	RFB 4075
85	RFB 4085

Single Compartment**Specifications**

- Floor box manufactured from galvanised steel.
- 20mm knockouts punched to accept flexible conduit.
- Minimum plug space 28mm
- Lid/trim assembly manufactured from stainless steel
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle

Overall Depth	Code
75	SFB 1075
85	SFB 1085

Three Compartment**Specifications**

- Floor box manufactured from galvanised steel.
- 20 & 25mm knockouts punched to accept flexible conduit.
- Panel cut out 300 x 200mm
- Minimum plug space 28mm
- Lid/trim assembly manufactured from flame retardant high impact ABS
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle

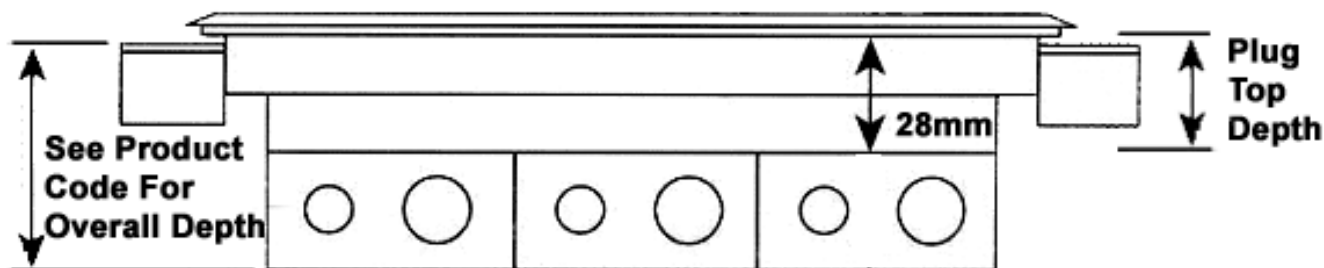
Overall Depth	Code
55	SFB 3055
65	SFB 3065
75	SFB 3075
85	SFB 3085

Four Compartment**Specifications**







- Floor box manufactured from galvanised steel.
- 20 & 25mm knockouts punched to accept flexible conduit.
- Panel cut out 300 x 200mm
- Minimum plug space 28mm
- Lid/trim assembly manufactured from flame retardant high impact ABS
- 2 cable exit flaps providing 60 x 15mm openings
- Integral moulded lifting handle

Overall Depth	Code
55	SFB 4055
65	SFB 4065
75	SFB 4075
85	SFB 4085

TECHNICAL DATA SHEET



Accessory Plates

Flat Plate for Flush Mounted Accessories					Recessed Plate for Surface Mounted Accessories		
Compartments					Compartments		
1	3	4			1	3	4
BU1000F	BU3000F	BU4000F		Blank Plate (88mm Wide)	-	-	-
PW1100F	PW3100F	PW4100F		Twin switched socket plate	-	-	-
DU1400F	DU3400F	DU4400F		4 x RJ45/LJ6C Plate	DU1400R	DU3400R	DU4400R
PU1100F	PU3100F	PU4100F		6 x RJ45/LJ6C Plate	PU1100R	PU3100R	PU4100R
PU1200F	PU3200F	PU4200F		2 gang accessory Plate	PU1200R	PU3200R	PU4200R
DU1601F	DU3601F	DU4601F		2 x standard 1 gang fittings Plate	DU1601R	DU3601R	DU4601R
DU1401F	DU3401F	DU4401F		4 x RW Data/Alpha Snap Plate	DU1401R	DU3401R	DU4401R

Plates can also be manufactured to suit specific customer requirements.

EuroMy